

17 LR 20 Lp+R



153 –
179 kNm



8,5 –
10,2 m



3,9 –
4 m



5 m



2.770 –
2.920 kg



415°



30 kNm




265 –
300 bar



2 x
Minimum
75 l/min
~ 75 kW





LS
Minimum
150 l/min
~ 78 kW

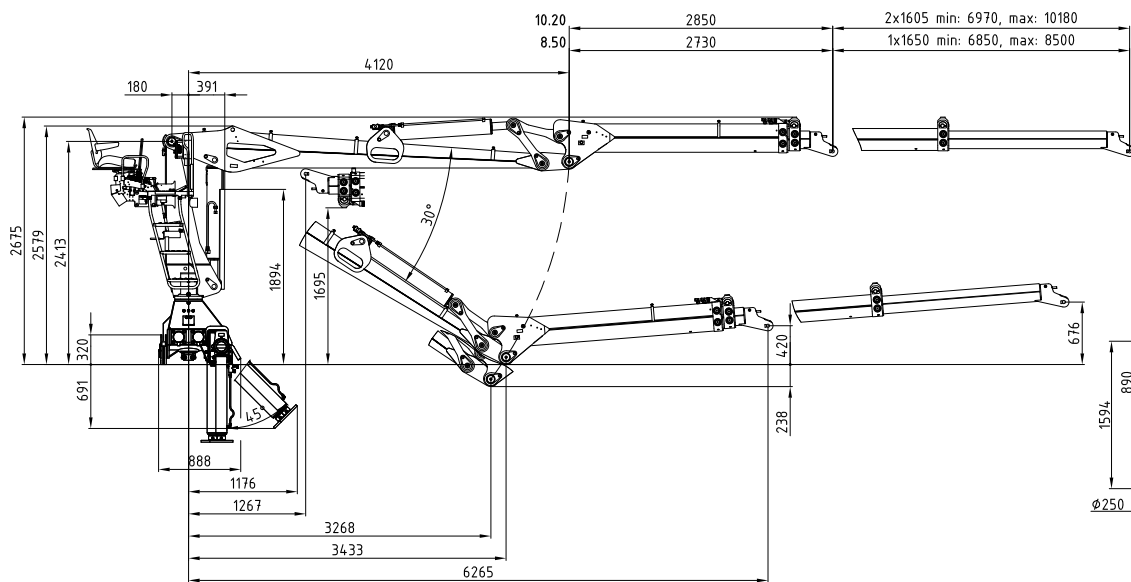


10.20


8.50




Kransockel breit
Crane base wide

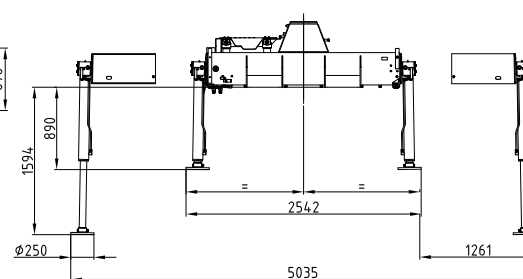


Vierkantabstützung
Squared outrigger

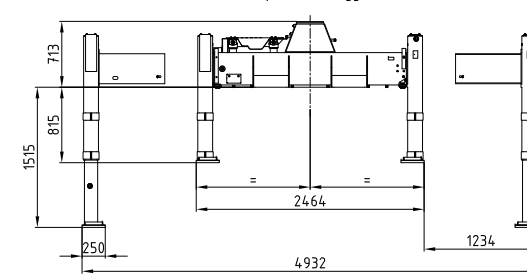



Rücksitz 01
Back seat 01

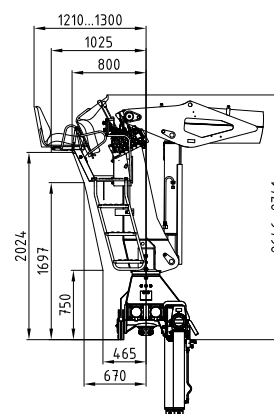

Rücksitz 04
Back seat 04

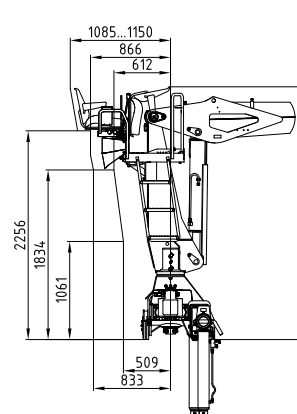

Seitensitz 04
Side seat 04

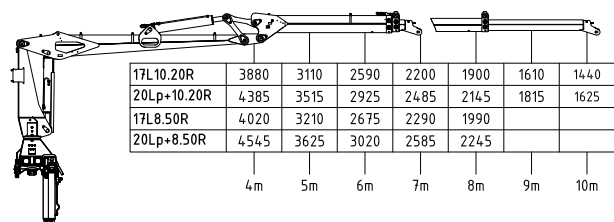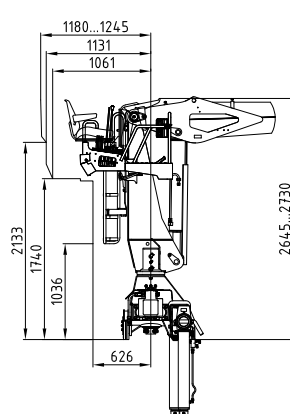

17L10.20R	3880	3110	2590	2200	1900	1610	1440	[kg]
20Lp+10.20R	4385	3515	2925	2485	2145	1815	1625	[kg]
17L8.50R	4020	3210	2675	2290	1990			[kg]
20Lp+8.50R	4545	3625	3020	2585	2245			[kg]