

6Z 7Zp+



52 -
64 kNm



7,0 -
8,6 m



2,66 -
2,75 m



3,3 -
4,1 m



1.270 -
1.350 kg



410°



14 kNm




205 -
240 bar




1x
Minimum
60 l/min
~ 30 kW




Minimum
90 l/min
~ 35 kW

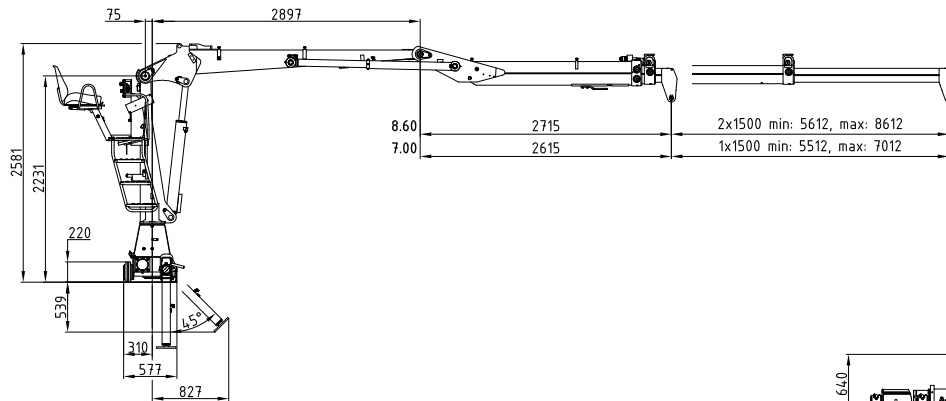


Kransockel Standard
Crane base standard




Kransockel mittig
Crane base centered




Kransockel stationär
Crane base stationary




Kransockel Standard
Crane base standard

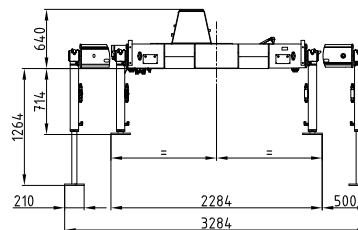


Kransockel mittig
Crane base centered

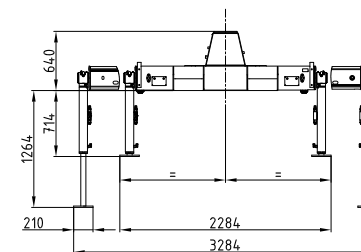

Klappabstützung
Folding support

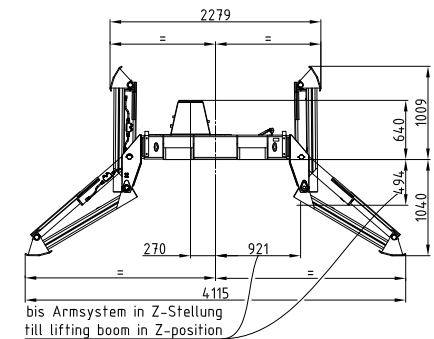


bis Armsystem in Z-Stellung
till lifting boom in Z-position

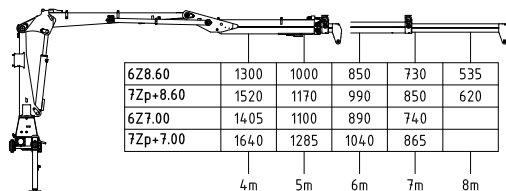


6Z8.60	1300	1000	850	730	535	[kg]
7Zp+8.60	1520	1170	990	850	620	[kg]
6Z7.00	1405	1100	890	740		[kg]
7Zp+7.00	1640	1285	1040	865		[kg]

4m 5m 6m 7m 8m


Rücksitz 01
Back seat 01



Rücksitz 04
Back seat 04



Seitensitz 04
Side seat 04

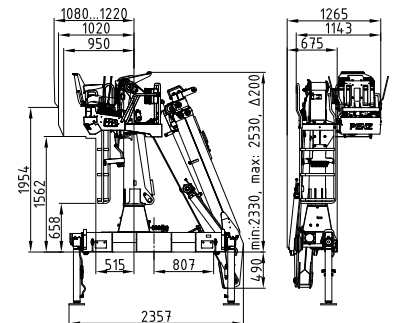

8.60

7.00

