


## DATA SHEET - GALVANIZED OCTAGONAL BUCKET WITH RUBBER HOSE

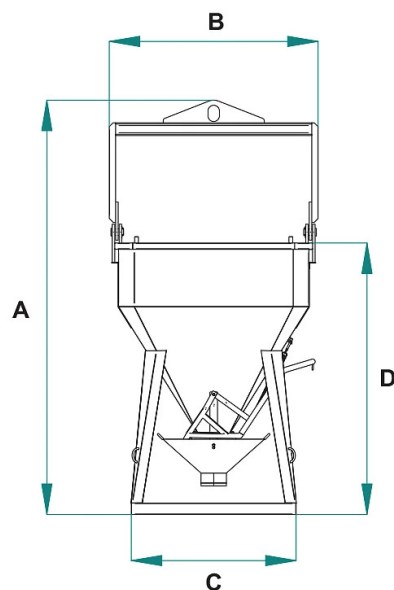

| Code      | Capacity (kg) | Capacity (L) | Weight (kg) | Dimensions (mm) |      |      |      |
|-----------|---------------|--------------|-------------|-----------------|------|------|------|
|           |               |              |             | A               | B    | C    | D    |
| BCE-40ZN  | 1040          | 400          | 225         | 2287            | 1128 | 1000 | 1405 |
| BCE-50ZN  | 1300          | 500          | 235         | 2387            | 1128 | 1000 | 1505 |
| BCE-60ZN  | 1560          | 600          | 255         | 2487            | 1128 | 1000 | 1605 |
| BCE-80ZN  | 2080          | 800          | 320         | 2710            | 1447 | 1200 | 1615 |
| BCE-99ZN  | 2600          | 1000         | 335         | 2807            | 1447 | 1200 | 1712 |
| BCE-125ZN | 3250          | 1250         | 405         | 2908            | 1447 | 1200 | 1885 |
| BCE-150ZN | 3900          | 1500         | 420         | 3048            | 1647 | 1300 | 1925 |
| BCE-175ZN | 4550          | 1750         | 435         | 3170            | 1647 | 1300 | 2020 |
| BCE-200ZN | 5200          | 2000         | 530         | 3290            | 1647 | 1300 | 2135 |
| BCE-250ZN | 6500          | 2500         | 630         | 2008            | 1780 | 1780 | 1927 |
| BCE-300ZN | 7800          | 3000         | 655         | 2183            | 1780 | 1780 | 2102 |

## DATA SHEET - GALVANIZED OCTAGONAL BUCKET WITH RUBBER HOSE

### Concrete buckets



## Galvanized octagonal bucket with rubber hose

### Galvanized octagonal concrete bucket with rubber hose and lever-operated opening

The galvanized octagonal concrete bucket, with lever-operated opening and rubber tube, BCE-ZN model, is the ideal solution for precise and reliable pours in the most demanding construction sites, thanks to its corrosion resistance. The galvanized finish ensures long-lasting protection against atmospheric agents, making it perfect for intensive use in outdoor environments and harsh weather conditions.

Designed to meet the needs of the most challenging sites, this galvanized bucket is indispensable for pouring large quantities of concrete into formwork, pillars, or slabs with maximum precision, avoiding pouring errors that could compromise structural stability. Thanks to its guillotine valve operated by a lever and the spring that enables automatic discharge closure, the concrete flow can be easily and safely managed.

The two-meter-long rubber tube, with a diameter of 200 mm, ensures controlled and precise flow during the pour, guaranteeing uniform concrete distribution. The BCE-ZN model is also equipped with a tilting lifting arch, customizable upon request, to adapt to different handling needs on site.

Key features of the BCE-ZN galvanized concrete bucket:

- Corrosion resistance thanks to galvanization;
- Designed for intensive use in outdoor environments;
- Guillotine closure system for precise flow control;
- 200 mm rubber tube for accurate concrete distribution;
- Compliance with safety standards UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204.

Each bucket comes with a certificate of conformity, metal label, and user and maintenance manual, ensuring maximum safety and reliability over time. Additionally, all our galvanized buckets are covered by a one-year warranty in accordance with the European Directive, to ensure durability and consistent performance.

### Application sectors

 Construction